




BLUETTI

B230 Portable Power Station

Please read this manual before use and follow its guidance. Keep this manual for future reference.

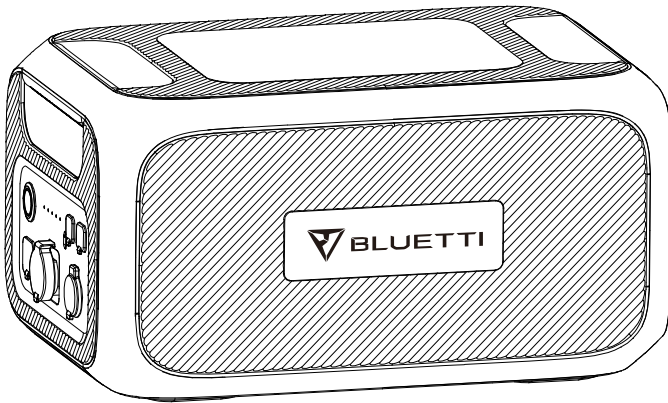

User Manual

Please read this manual before use and follow its guidance. Keep this manual for future reference.

Contents

01.BRIEF INTRODUCTION	01
02.ABBREVIATION	01
03.SAFETY INSTRUCTION.....	01
04.BLUETTI APP	02
05.IN THE BOX	03
06.FEATURES	05
07.RECHARGE	06
08.AC200MAX + B230 EXTRA BATTERY	07
09.TECHNICAL SPECIFICATIONS	08
10.FAQ (Frequently Asked Questions)	09
11.DECLARATION	10

1. BRIEF INTRODUCTION

B230, extension battery pack owns 2048Wh capacity to support BLUETTI AC200Max series. This setup can be an emergency power center to run your home or travel essential appliances , or with enough solar panels, you can even live off-grid life on the way.

2. ABBREVIATION

- BMS: Battery Management System
- SOC: State of Charge
- AC: Alternating Current
- DC: Direct Current
- PV: Solar Panel(s) Charging (Photovoltaic)
- Grid: Home Power Supplied by Utility
- T500: 500W Additional Adapter
- DOD: Depth of Discharge


3. SAFETY INSTRUCTION

- DO NOT place the power station near heat sources. It is prohibited to place the equipment in an environment with flammable, explosive gas, or smoke. It is also prohibited to operate the equipment in this environment.
- DO NOT attempt to replace the internal battery or any other component of the equipment by anyone other than authorized personnel. There are no enduser serviceable components.
- DO NOT operate in wet conditions. If the equipment becomes wet, please let the unit dry completely before using.
- Please ensure proper ventilation while in use and do not obstruct fan openings. Inadequate ventilation may cause permanent damage to equipment.
- DO NOT stack anything on top of the power station while in storage or while in use. DO NOT move the unit while operating as vibrations and sudden impacts may lead to poor connections to the hardware inside.
- Warning: DO NOT insert foreign objects into any ports of the B230. Please use carefully and keep children away from it.
- In case of fire, only a dry powder fire extinguisher is suitable for the product.

- For safety purposes, please use only the original charger and cables designed for the equipment. We are not liable for damage caused by third-party equipment and may render your warranty invalid.



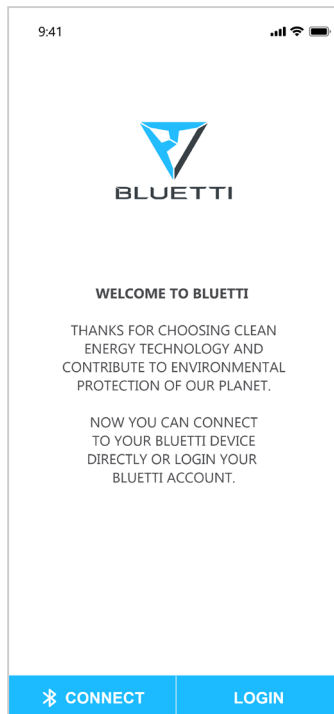


4. BLUETTI APP

With BLUETTI App, the remaining capacity of B230 can be viewed via Bluetooth only when B230 has been connected to AC200Max already. Please turn to the AC200Max User Manual for detailed information.


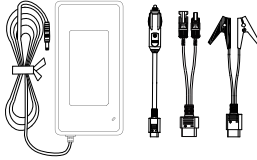



5.IN THE BOX


Standard Accessories

No.	Category	Quantity
1	 B230 Extension Battery	1
2	 Capacity Fusion Cable(P090A) For battery expansion, connect B230 with AC200Max.	1
3	 User Manual Please read the manual before use and follow its guidance, keep this manual for future reference.	1
4	 Warranty Card Please keep this Warranty Card properly.	1
5	 Certificate of QC PASS	1

Additional Purchase Accessories
Sold on BLUETTIPOWER.COM

No.	Category
Optional Input Cable	 <p>T500 Adapter</p>
	 <p>D050S Charging Kit(Including D050S unit, PV Charging Cable, Car Charging Cable)</p>
	 <p>D050S Lead-acid Charging Cable</p>

6.FEATURES

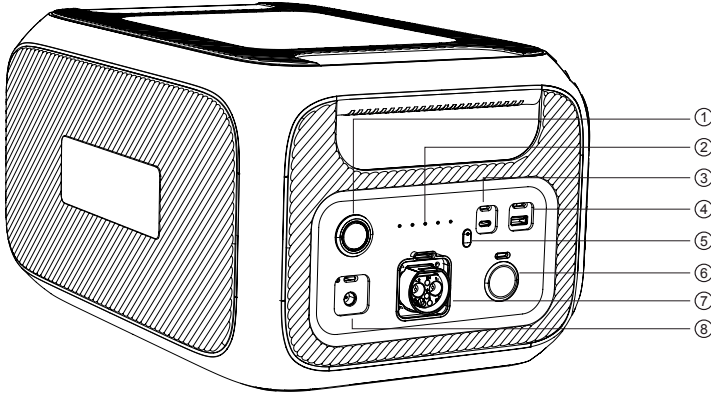

01 Power Button

Press to turn ON/OFF the unit.

02 LED Capacity Indicator

Show the remaining capacity of the unit(0-20-40-60-80-100%)

03 USB-A Output Port

Supports QC3.0 protocol.

04 USB-C

Can be used via USB-C to USB-C cable to charge most devices in the market such as Pixel Phone, Macbook Pro at 100W Max.

05 DC Button

Press to turn ON/OFF DC output.

06 Cigarette Lighter Port

Output port for devices with corresponding plug such as vehicle-use vacuum, mini fridge.

07 Battery Extension Port


Port of connecting B230 with AC200Max.

08 Input Port

To charge B230 via T500 adapter. For vehicle, extra solar power via D050S.

7.RECHARGE

AC Charging (Default)

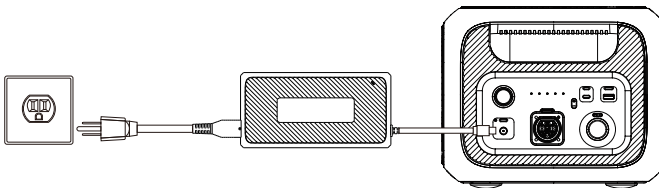

(Charge B230 through T500 adapter)

Estimation of Charging Time: $2048\text{Wh} / 500\text{W(T500 adapter)} + (0.5 - 1 \text{ Hrs Trickle Charging}) = 4.6\text{-}5.1\text{Hrs}$ for AC200Max fully charged via T500 adapter only.


Estimation of Running Time: $2048\text{Wh} / 100\text{W(Television)} * 0.9(\text{DoD}) * 0.9(\eta) = 16.6\text{Hrs}$.

DoD indicates Depth of Discharge.

η indicates efficiency.

SOC-A: the remaining capacity of AC200Max SOC-B: B230 battery pack

Extension Charging 01

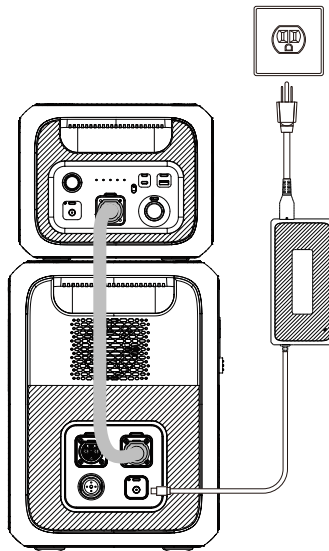


(T500 adapter on AC200Max)

When SOC-A = SOC-B, both of the two units will be charged simultaneously.

When SOC-A < SOC-B, AC200Max will be charged first by all power source in the Capacity Fusion System until SOC-A = SOC-B, then both of the two units will be charged simultaneously.

When SOC-A > SOC-B, only AC200Max will be recharged.

Extension Charging 02

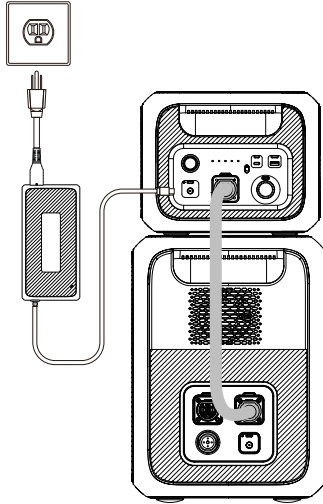


(T500 adapter on B230)


When SOC-A = SOC-B, both of the two units will be charged simultaneously.
When SOC-A < SOC-B, B230 will be charged by exterior power source, AC200Max will be charged by B230.
When SOC-A > SOC-B, B230 will be charged first by all power source in the Capacity Fusion System until SOC-B = SOC-A, then both of the two units will be charged simultaneously.

8.AC200MAX + B230 EXTRA BATTERY


- A. Press to turn ON/OFF the power transmission from extended battery.
- B. Switch to LOCK/UNLOCK the fusion cable with AC200Max.
- C. Plug the Capacity Fusion Cable to the battery expansion port of both AC200Max and B230.

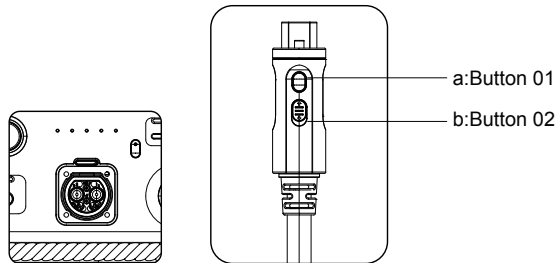

(Hotswap extension battery easy setup.)

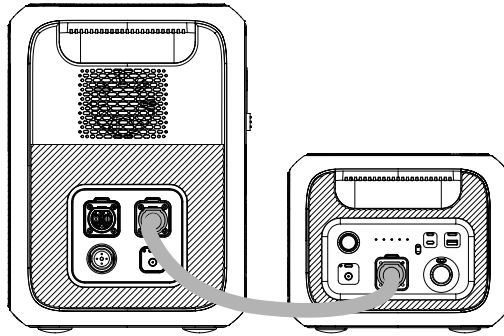

(AC200Max + *1 B230 = 4096Wh Capacity)

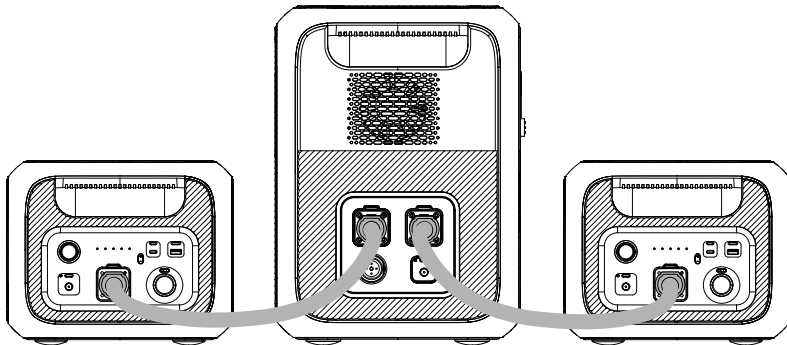

(AC200MAX with *2 B230)

9. TECHNICAL SPECIFICATIONS

General Specs	
Model No.	B230
Net Weight	21.8kg (48.0lbs)
Dimensions	420*280*227.5mm (16.5*11.0*8.91in)
Charge Temperature	0-40°C (32-104 °F)
Discharge Temperature	-20-40°C (-4-104 °F)
Storage Temperature	-20-40°C (-13-104 °F)

Working Environment Humidity	10-90%
Capacity	2048Wh (40Ah)
Battery Type	LiFePO4
Standard Battery Voltage	51.2VDC
DC Output	
Cigarette Lighter Port	*1 12VDC/10A
USB-A	*1 3.6-12VDC, 3A,18W
USB-C	*1 5-15VDC,3A; 20VDC,5A,100W
AC Input	
AC(through 7909 via T500)	500W Max
Specs	58.8VDC, 8A
PV Input	
MPPT(single) Voltage Limit	12-72VDC
Max. Power of Input	200W Max
Max Input Current	10A Max
Battery Extension Port *2	
Specs	58.8VDC, 80A

10. FAQ (Frequently Asked Questions)

- How to claim the warranty?

Please refer to the warranty card you received from where you have ordered the product from.

- Can the unit be upgraded?

When B230 has been connected to AC200Max, the firmware including ARM, DSP, IoT and BMS can be upgraded online through OTA via BLUETTI APP.

- Can it be charged and discharged at the same time?

Yes B230 supports simultaneous recharge&discharge.

- How to store B230?

We recommend a 3-6 months charging to 80% capacity to extended the battery life, over-discharge will damage the battery cell.

11. DECLARATION

- Some changes may occur without notice such as external appearance or specifications due to availability of material supplies or hardware improvements of the product over time.

- BLUETTI shall not be liable for any damage caused by force majeure such as fires, typhoons, floods, earthquakes or the user's intentional negligence, misuse or other abnormal conditions.

- No compensation for damages shall be made for utilizing non-standard adapters and accessories.

- This unit is not suitable for use on the relevant equipment or machines involving:

Personal safety, such as atomic energy devices, aerospace devices, emergency medical devices, etc., or any equipment or machines that require extremely highly reliable power sources. We are not responsible for accidents, fires, wrongful or negligent actions caused by such equipment or machines which results in damage.

